


This file has been cleaned of potential threats.

If you confirm that the file is coming from a trusted source, you can send the following SHA-256 hash value to your admin for the original file.

defb82aee91bd18eaefca3bc2e928e8401309da9165fc8b9fb686e4ee47a75fa

To view the reconstructed contents, please SCROLL DOWN to next page.

PIG launching/ receiving station

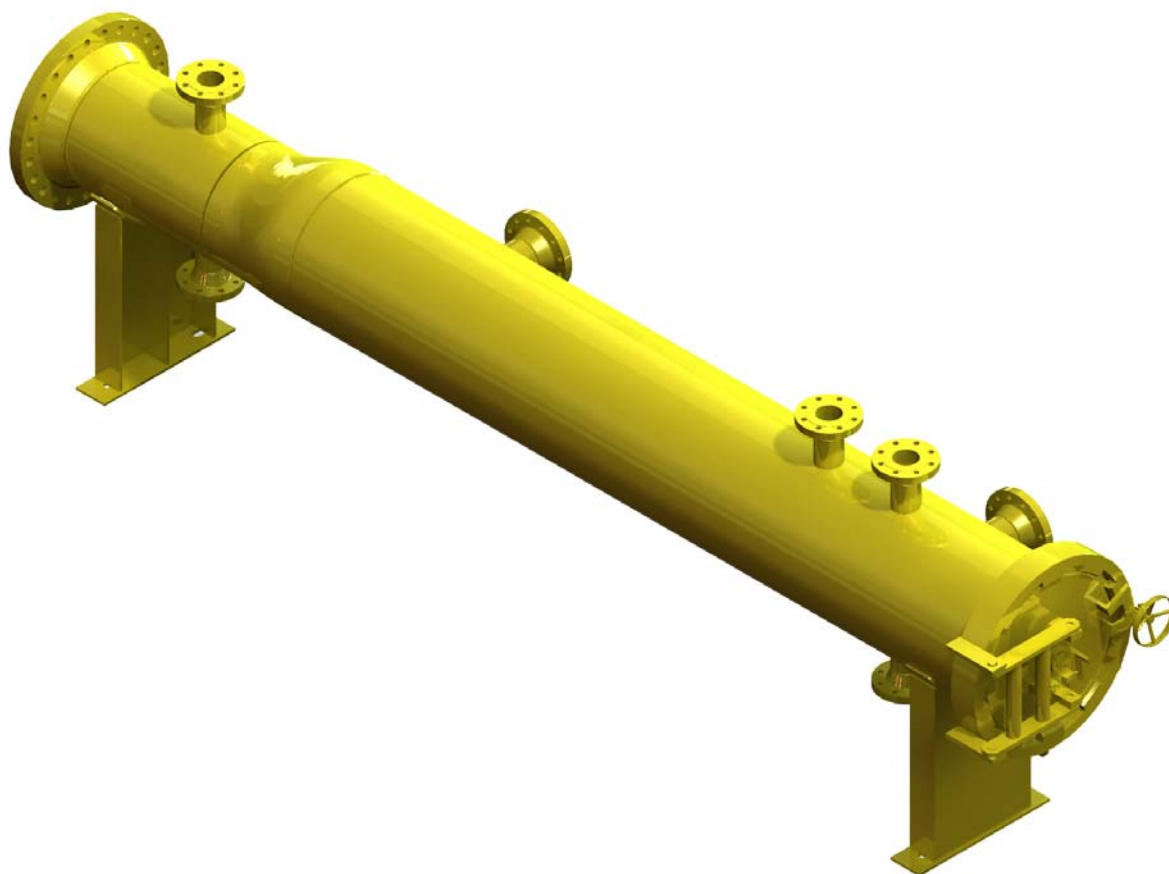

Introduction

PIG launching / receiving stations are used for various applications such as:

- cleaning
- removal of incrustations and deposits
- removal of condensate from the pipeline
- separation of products pumped one after another within the same pipeline
- inspection, detection and monitoring
- measurement and control
- service

The main components of PIG launching / receiving station are:

- PIG launching chamber
- Quick opening closure
- PIG holder
- Jib crane
- Carriage
- Push travel trolley
- Trolley

Technical characteristics

Nominal diameter:	DN 200 ÷ 1100
Nominal pressure/ pressure class:	PN 25, 40, 64, 100 bar / ANSI 300, ANSI 600
Ambient temperature:	-30 ÷ + 50 °C
Intended to be used in	transmission pipelines

The manufacturer reserves the right to make modifications without any prior notification.

CT Nr. 476 / 2011

TOTALGAZ INDUSTRIE
Nr. R.C.: J-22-3277/1994 Șos. Păcurari, nr. 128,
CUI: RO6658553 Iași, cod 700545, România
IBAN: RO28BRDE240SV13842272400 Tel. : 0040-232-216.391(2)
B.R.D. G.S.G. Iași Fax : 0040-232-215.983
E-mail: office@totalgaz.ro
Web: www.totalgaz.ro

