






This file has been cleaned of potential threats.

If you confirm that the file is coming from a trusted source, you can send the following SHA-256 hash value to your admin for the original file.

435083d75dfeb255c2849d380ce6cfbe8016b263fc3e9294f082cc03fe3597be

To view the reconstructed contents, please SCROLL DOWN to next page.

GAS SEPARATORS STG 650

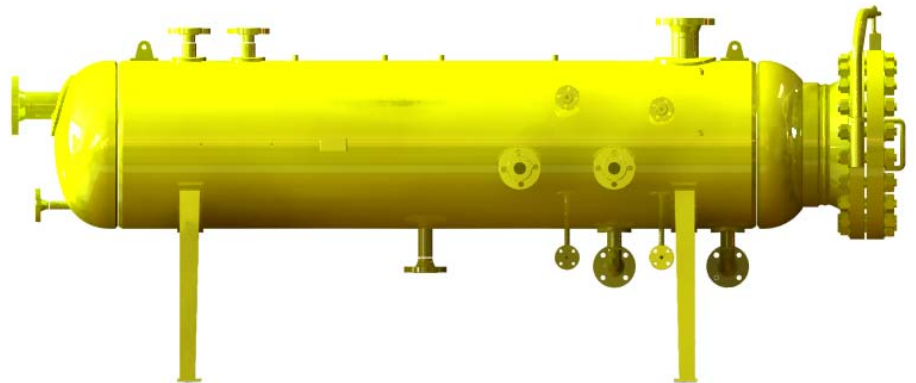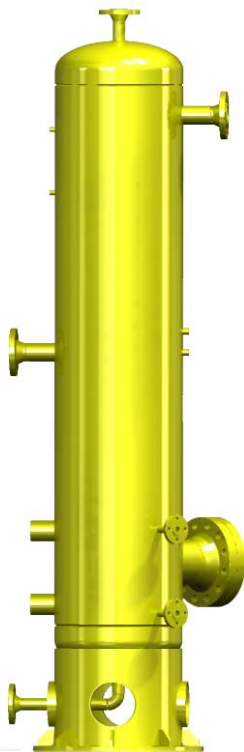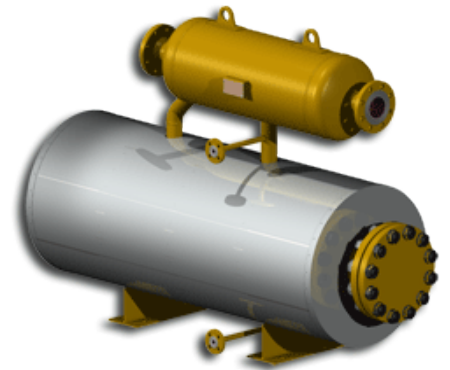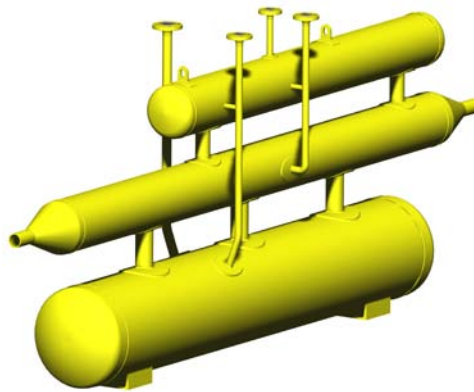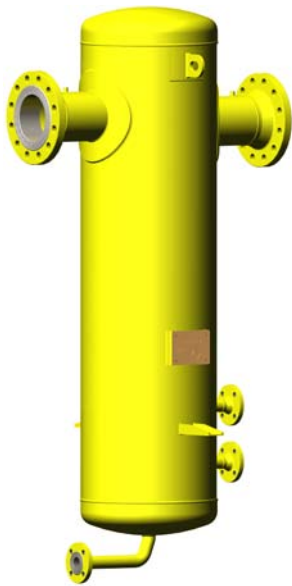

Introduction

STG 650 gas separators are mechanical devices designed to collect and remove solid and liquid impurities from the gas flow, in order to prevent the tubes, equipment, and devices against damages caused due to particle contaminated gas.

Considering the operating conditions, STG 650 gas separators can be inner provided with deflector, demister, coalescer plates, vane plates, axial cyclone, multicyclone.

On request, Totalgaz Industrie can provide gas separator custom solutions in order to meet the most demanding client requirements.

Every gas separator is manufactured in accordance with European *Pressure Equipment Directive* (PED), ASME Code for *Unfired pressure vessels*, ISCIR (State Inspection for Control of Boilers, Pressure Vessels and Hoisting Equipment) or with any other local, state, and regional provisions specified by the client.

Depending on the provided inner equipment, STG 650 separators can be used in natural gas regulating – metering stations, gas delivery stations, gas dehydration units, compressor stations, etc. in order to collect solid and liquid impurities.

On demand, in order to ensure higher operational safety, the separators can be equipped with:

- Level indicator to monitor liquid level from the collection chamber;
- Level indicators / transmitters;
- Minimum - minimorum level signal;
- Maximum – maximorum level signal;
- Automatic drain of impurities;
- Safety valve;
- Thermal insulation;
- Pressure gauge;
- Differential pressure gauge;
- Thermometer;
- Collection chamber electrical heating;
- Drain pipelines electrical heating.

Advantages of STG 650 separators

- high separation efficiency and low pressure drop;
- excellent liquid and solid particles removal;
- require virtually no maintenance;
- excellent operational reliability due to the high quality materials, accurate processing and regular control;
- multiple applications;
- size range providing proper solution to any problem mentioned
- design based on international standards governing this type of products, ISO 9001 certified production system.

Technical characteristics

Table 1 – Technical characteristics

Separator type		
STG 651	Inlet / outlet diameter	DN 25 ÷ DN 500
	Design pressure [bar]	PN 6, 16, 25, 40, 64, 100
STG 652	Inlet / outlet diameter	DN 25 ÷ DN 300
	Design pressure [bar]	PN 6, 16, 25, 40, 64, 100
STG 653	Inlet / outlet diameter	DN 25 ÷ DN 300
	Design pressure [bar]	PN 6, 16, 25, 40, 64, 100
STG 654	Inlet / outlet diameter	DN 80 ÷ DN 600
	Design pressure [bar]	PN 6, 16, 25, 40, 50, 64, 80, 100, 150, 250
STG 655	Inlet / outlet diameter	DN 80 ÷ DN 600
	Design pressure [bar]	PN 6, 16, 25, 40, 50, 64, 80, 100, 150, 250
Working fluid		Natural gas or other non-corrosive gases
Ambient temperature [°C]		-20 ÷ 80 (optionally, -30 ÷ 80)*
Working fluid temperature [°C]		-10 ÷ 60 (optionally, -20 ÷ 60)*

*On request, lower temperatures can be considered.

Materials

Table 2 – Materials employed for STG 650 separators

Part	Material
Body	Carbon steel
Flange	Carbon steel
Cover	Carbon steel
Connection	Carbon steel
Gaskets	NBR, Viton, PTFE,
Vanes	Stainless steel, carbon steel
Cyclones	Cast iron, stainless steel, carbon steel

Custom design separators can be manufactured using materials upon request.

Constructive variants

Centrifugal separators

Operation

Centrifugal separator uses centrifugal force to remove solid and liquid particles out of the gas stream. This force speeds up the settling and the coalescence of fine liquid droplets and makes possible the solid particle separation. The gas stream enters the inlet connection and flows through the axial cyclone. The solid and liquid particles separate from gas under the action of the centrifugal force and are collected at the lower part of the vertical separator body, respectively in the collection chamber placed under the horizontal separator body. The clean gas is exhausted through the outlet connection.

Efficiency

Centrifugal separators manufactured by **Totalgaz Industrie** provide a high separation rate of both liquid and solid particles. More than 99 % of the particles larger than 12 micrometers are removed from the gas stream.

Multicyclone separators

Operation

The multicyclone separators are designed to remove both solid and liquid particles from the gas stream, providing high efficiency over a wide range of flows and pressures. The separators operate on centrifugal force principle. The solid or liquid particles from the gas stream enter the multicyclones with higher inertia than of the gas molecules. The multicyclones create a reverse flow cyclonic vortex and the centrifugal strength forces the particles on the cyclone wall, the solid impurities fall down to the bottom, while the liquid droplets coalesce until they get a sufficient size to drop by their own weight. The liquid drains down to a sump while the clean gas flows through outlet nozzle.

Efficiency


Totalgaz Industrie multicyclone separators ensure the following separation rates:

- 99.9 % separation of solid particles larger than 10 microns;
- 99.5 % separation of liquid particles larger than 3 microns.

Vane type separators

Operation

The working principle is based on the law of gravity and centrifugal force principle. As schematized in Figure 5, the mist laden gas passes through the parallel vane plates and is forced to change direction several times. As the gas changes direction, inertia or kinetic energy maintain the straight flow path of the liquid droplets and determine some droplets to strike adjacent vanes. There, they are held by surface forces and coalesce with other droplets. The agglomerate liquid drains down vane surface to a sump.

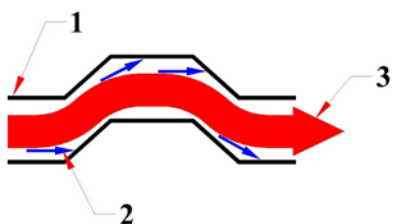

- 1 – vane plate;*
- 2 – liquid droplets striking the plates;*
- 3 – gas stream, changing directions between plates.*

Figure 1 – Gas and mist flow (top view)

Efficiency

Vane type separators manufactured by **Totalgaz Industrie** ensure 99.9% separation efficiency for liquid particles larger than 3 microns.

Three - phase separators

Operation

The three-phase separator operation is indicated in Figure 2. The well effluent enters the separator body through inlet connection and reaches the deflector (1). The impact causes initial separation of the liquid from the gas flow and fluid flow atomization that cause faster droplet separation. The liquid is forced to flow to the accumulation area and the large droplets from the gas flow start to fall due to the centrifugal force, as well as due to sudden speed decrease caused by the passage area extension.

The low gas density and the small droplets float in the upper side of the vessel, while the liquid phases accumulate at the lower part. Natural separation takes place between water and condensate due to density. A weir plate (7) separates the water collecting area from that of the condensate. The weir plate (7) can be of adjustable height and therefore, the three-phase separator can accommodate to different well effluent phase concentrations.

Then, the fluid passes between the coalescer plates (3) that forward the liquid droplets to coalesce for centrifugal separation.

In order to ensure the foam breaking of the liquid phase, the separator is fitted with a straightening plate (4). Prior to leaving the vessel, the gas flows the demister (5) that filters the small residual droplets from the flow. The gas pressure stays constant due to a pneumatic pressure retroregulator.

The water and liquid condensate are discharged through specially provided connections. The purging is performed by means of pneumatic control valves actuated by pneumatic level controllers. Liquid levels can be monitored due to visual magnetic level indicators.

Once the phases are separated and discharged from the vessel, they can be measured.

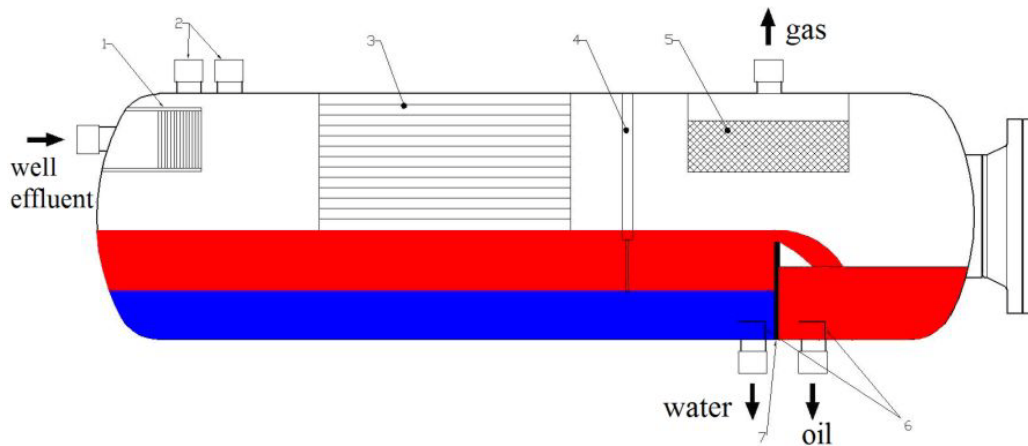


Figure 2 – Three –phase separator vessel

*1 - deflector; 2 – safety valve connections; 3 – coalescer plates; 4 – straightening plate;
5 - demister; 6 – flow regulators; 7 – weir plate.*

Other separators

Large size separators with virtually unlimited configuration options, suitable for any instrumentation, piping or orientation arrangement can be designed and produced by **Totalgaz Industrie**. This includes fully equipped two-phase and three-phase separators, as well as test separators. They can be mobile skid mounted, truck or trailer mounted, stationary, etc.

Configuration options

Totalgaz Industrie gas separators are available in a wide range of configurations. The customary options of vertical separators are specified in Figure 3, while of the horizontal separators are indicated in Figure 4. Other configurations can be manufactured on request, as well as customer - specific separators, designed and manufactured for any application, size, material and pressure.

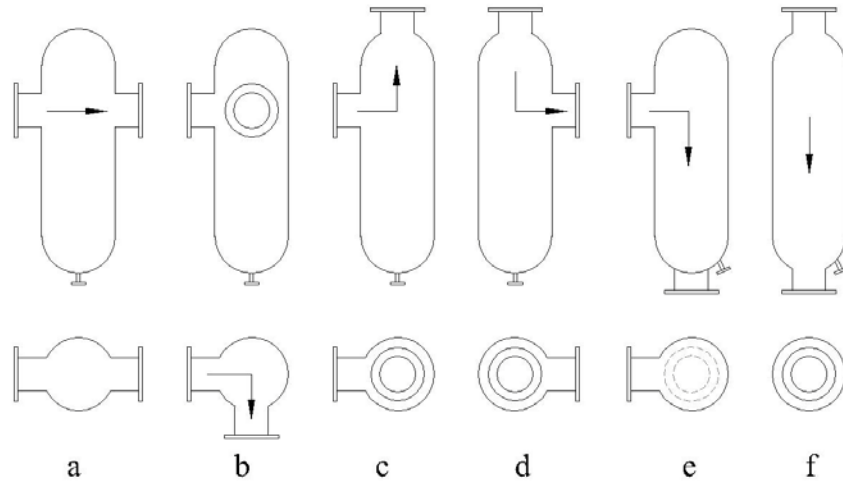


Figure 3 – Optional configurations of vertical separators

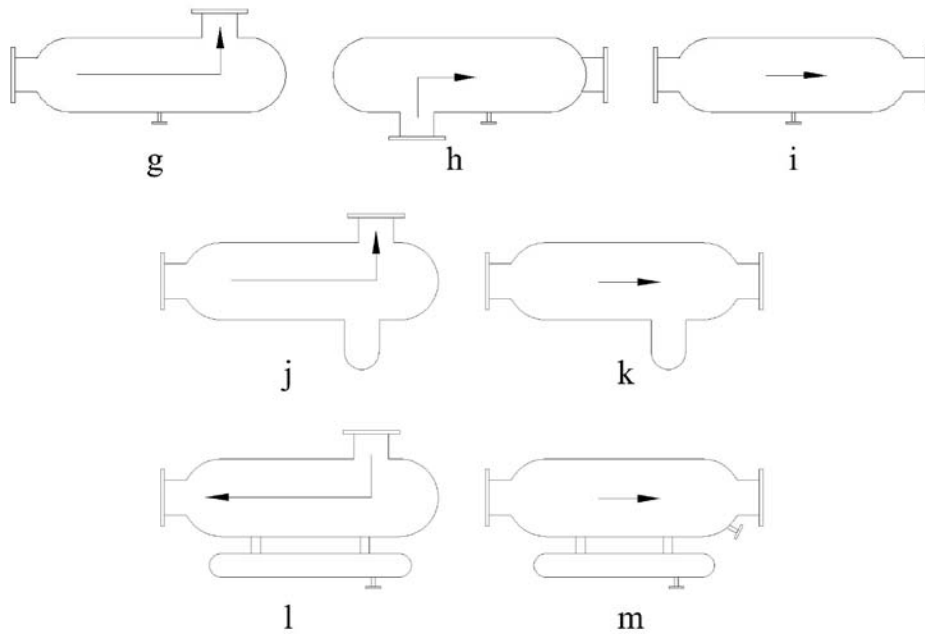


Figure 8 – Optional configurations of horizontal separators
j, k, l, m – with liquid collector

In order to meet client requirements regarding installation, **Totalgaz Industrie** gas separators are available in 3 variants of base support arrangements (Figure 5).


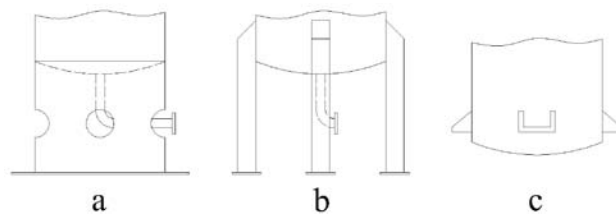


Figure 5 – Base supports

a – „skirt” and base ring support; b – saddle support; c – „lug” support


Overall dimensions

STG 651

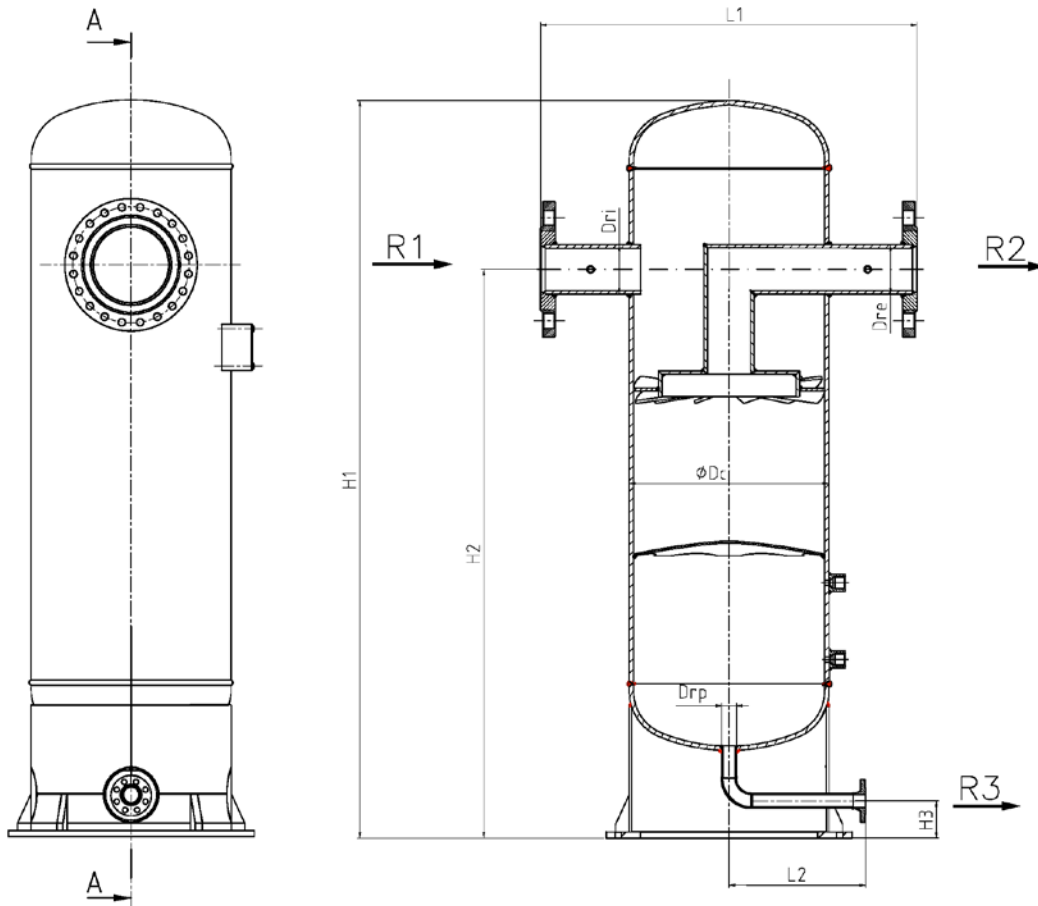


Separator model	Dri [mm]	Dre [mm]	H1 [mm]	H2 [mm]	H3 [mm]	Dc [mm]	Drp [mm]	L1 [mm]	L2 [mm]
STG 651	25	25	730	600	150	139.7	33.7	400	160
	32	32	730	600	150	139.7	33.7	400	160
	40	40	760	630	150	139.7	33.7	415	170
	50	50	770	630	150	168.3	33.7	450	180
	65	65	800	630	150	193.7	33.7	490	190
	80	80	950	760	200	219.1	60.3	520	220
	100	100	1000	820	200	273	60.3	610	240
	125	125	1200	980	200	323.9	60.3	670	270
	150	150	1300	1000	200	355.6	60.3	710	300
	200	200	1600	1220	200	508	88.9	900	390
	250	250	2000	1540	200	610	88.9	1035	430
	300	300	2300	1770	230	711	114.3	1170	500
	350	350	2500	1900	230	813	114.3	1260	560
	400	400	2700	2100	230	914	114.3	1390	640
500	500	3000	2200	230	1118	114.3	1620	740	

STG 652

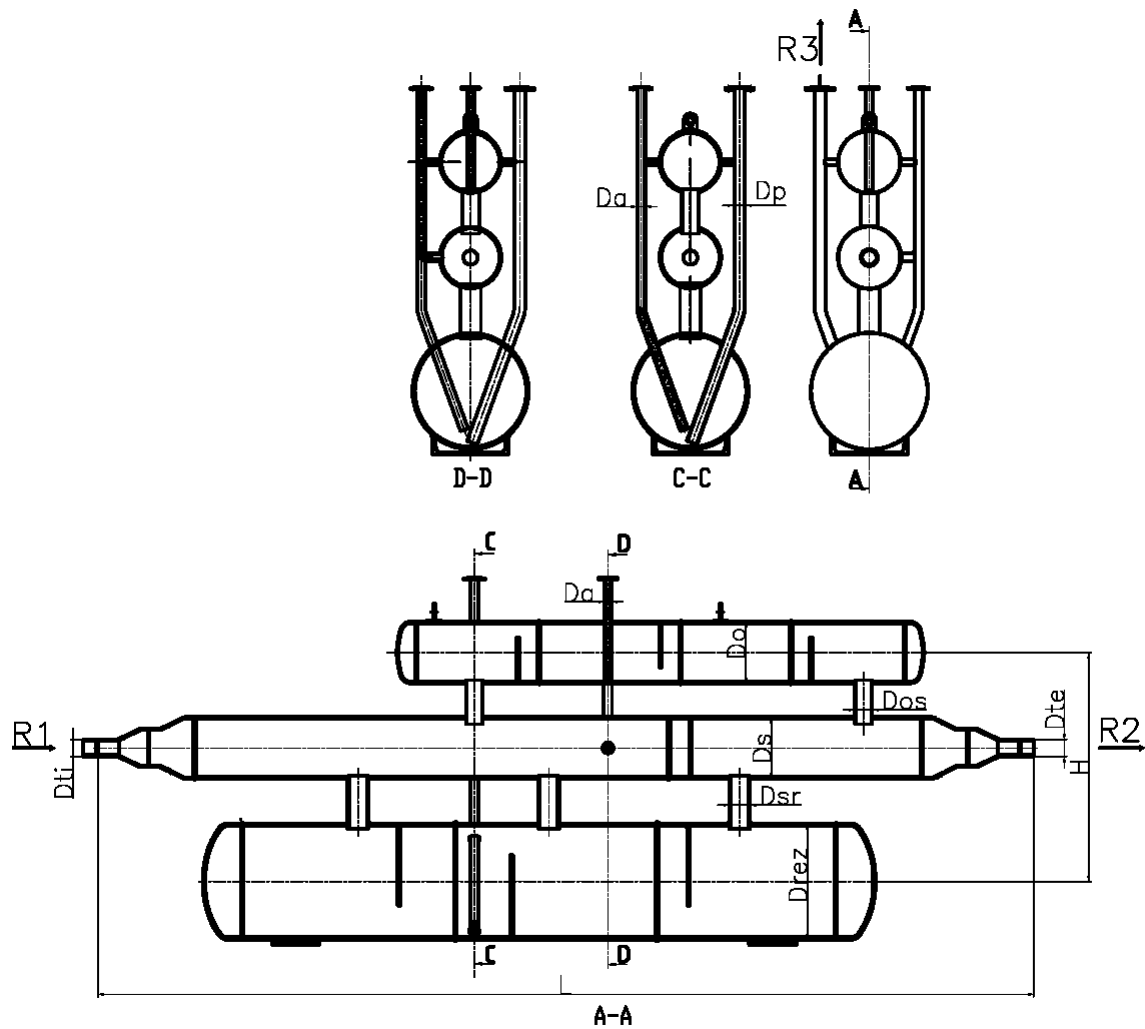


Separator model	DN	D_{ti}/D_{te} [mm]	D_s/D_o [mm]	D_{rez} [mm]	D_{os}/D_{sr} [mm]	D_p [mm]	D_a [mm]	H [mm]	L [mm]
STG 652	25	33.7	114.3	323.9	48.3	60.3	33.7	800	4200
	32	42.4	114.3	323.9	48.3	60.3	33.7	800	4200
	40	48.3	114.3	323.9	48.3	60.3	33.7	800	4200
	50	60.3	219.1	406.4	88.9	60.3	33.7	1000	4600
	80	88.9	219.1	406.4	88.9	60.3	33.7	1000	4600
	100	114.3	323.9	508	114.3	60.3	48.3	1200	5000
	150	168.3	406.4	610	168.3	114.3	48.3	1350	5200
	200	219.1	406.4	610	219.1	114.3	60.3	1350	5200
	250	273.1	610	711	273.1	114.3	60.3	1500	5500
300	323.9	610	711	323.9	114.3	60.3	1500	5500	

STG 653

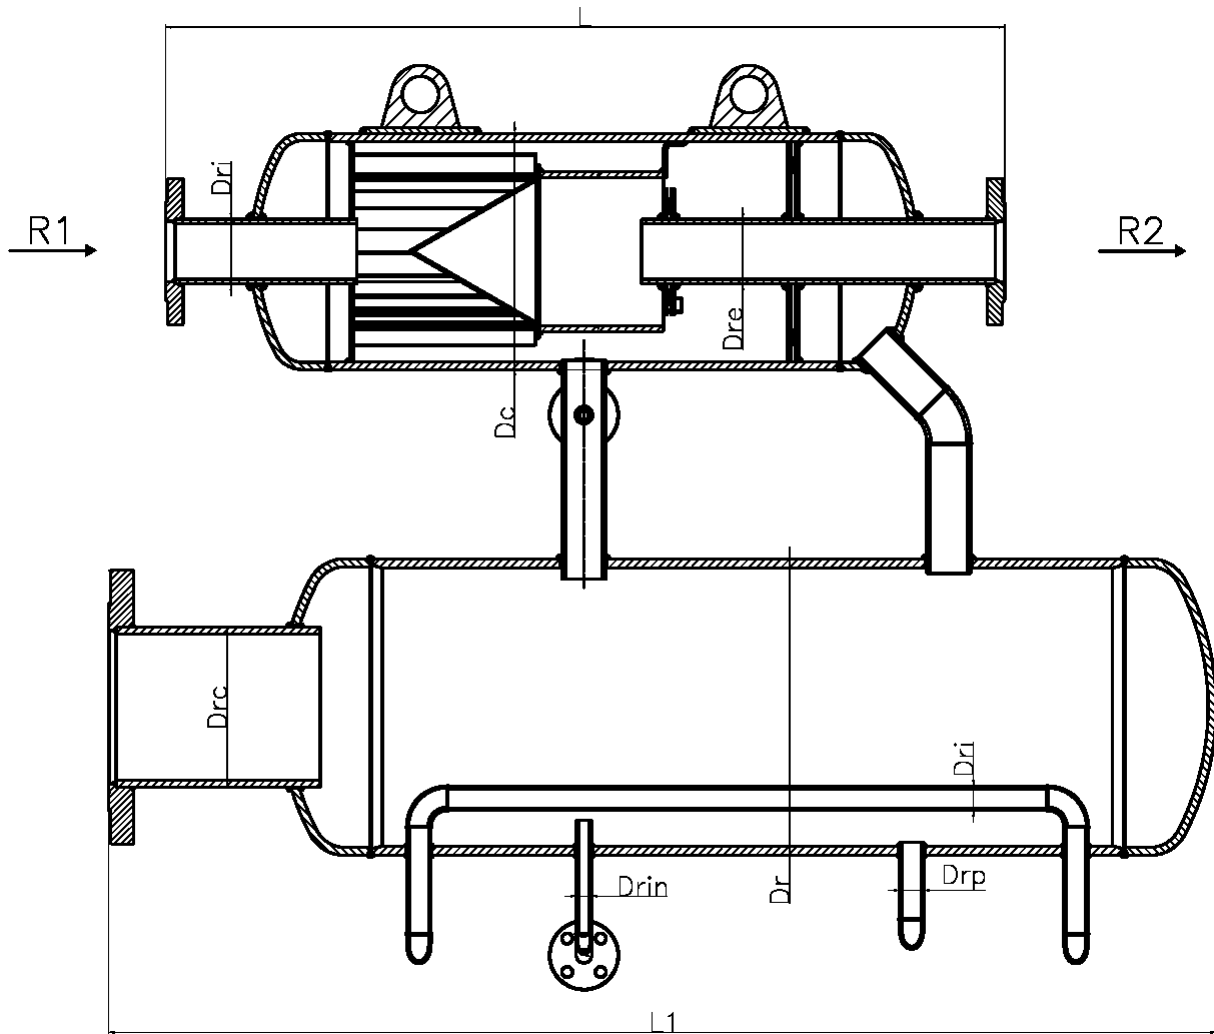


Separator model	DN	Dri/Dre [mm]	Dc [mm]	Dr [mm]	Drc [mm]	Drp [mm]	Drin [mm]	Dri [mm]	L [mm]	L1 [mm]
STG 653	25	33.7	219.1	323.9	114.3	33.7	21.3	33.7	950	1300
	32	42.4	219.1	323.9	114.3	33.7	21.3	33.7	950	1300
	40	48.3	219.1	323.9	114.3	33.7	21.3	33.7	1150	1500
	50	60.3	323.9	406.4	219.1	33.7	21.3	33.7	1150	1500
	80	88.9	323.9	406.4	219.1	33.7	21.3	33.7	1350	1700
	100	114.3	323.9	406.4	219.1	60.3	21.3	33.7	1500	1850
	150	168.3	508	610	323.9	60.3	21.3	33.7	1650	2000
	200	219.1	508	610	323.9	60.3	21.3	33.7	1750	2100
	250	273.1	610	813	406.4	60.3	21.3	33.7	1900	2250
300	323.9	610	813	406.4	60.3	21.3	33.7	2100	2500	

STG 654

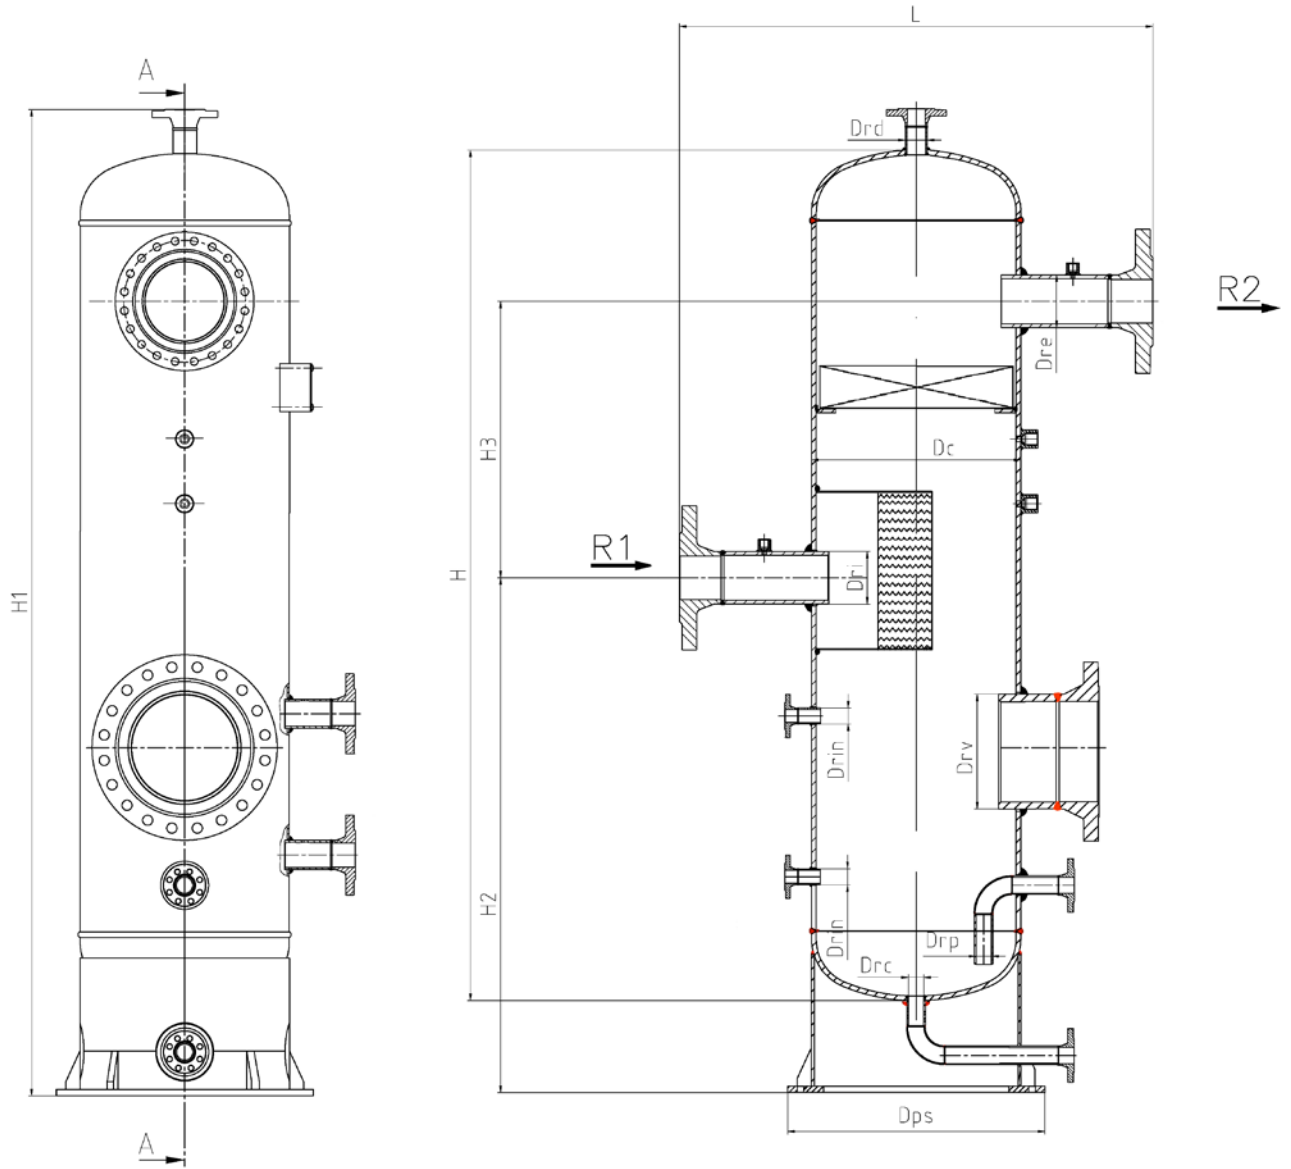

Separator model	Dri [mm]	Dre [mm]	Dc [mm]	H [mm]	L [mm]	H1 [mm]	H2 [mm]	H3 [mm]	Drv [mm]	Drc [mm]						
STG 654	80		406	1500	750	2300	1200	750	168.3	60.3						
	100			2500		3300	2200									
	150		610	1500	950	2700	1200	1000	323.9	88.9						
	200					2500	3700				2200					
	250					3000	4200				2700					
	300			2500	3700		2000									
	350				4200		2500									
	400			813	2500	1150	3700				2000	1250	406.4	114.3		
	100		3000				4200	2500								
	150		4500				5800	4000								
	200				3000	4300	2100									
	250					5900	3600									
	300		1219		6000	1550	7400	5100	1700	508	114.3					
	350			4500			7700	4900								
	400						6000	4900								
	450			3000	1850	7700	4900	2100				508	114.3			
	500													4500	6200	3400
	600													6000	7700	4900
	80		1524	3000	2150	4900	1600	2500	508	114.3						
	100					4500	6400				3100					
	150					6000	7900				4600					
	200			4500	7900		4600									
	250										6000					
	300			1829	3000	2150	7900				4600	2500	508	114.3		
350		4500	6400					3100								
400		6000	7900					4600								
450					4500	7900	4600									
500									6000							
600		6000														

STG 655

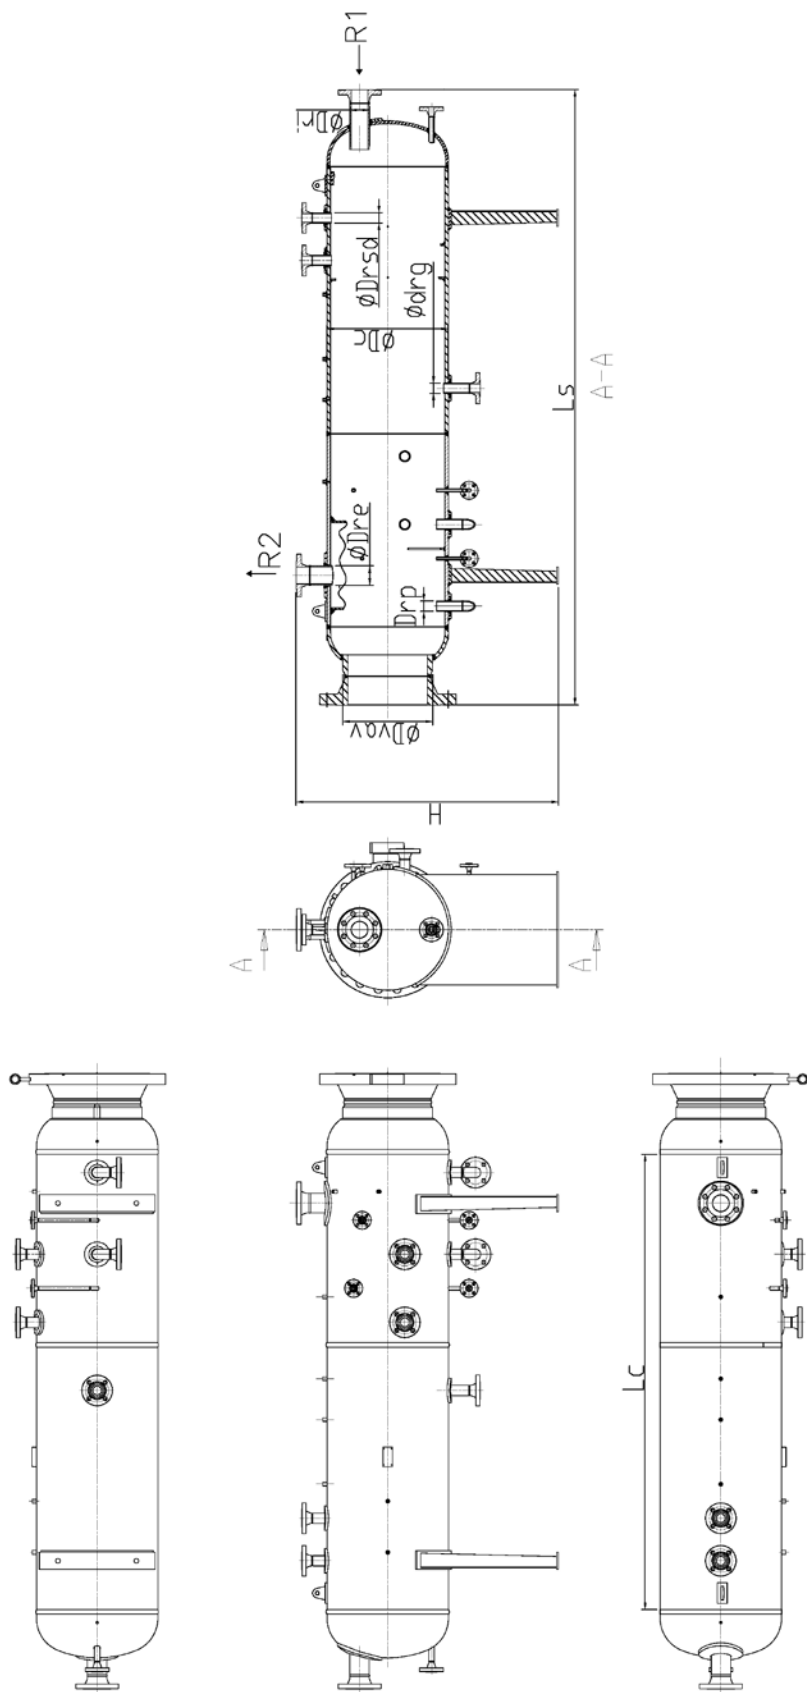


	Dri [mm]	Dre [mm]	Dc [mm]	Lc [mm]	Ls [mm]	H [mm]	Dvav [mm]	Drp [mm]	drg [mm]
--	--------------------	--------------------	-------------------	-------------------	-------------------	------------------	---------------------	--------------------	--------------------

STG 655	80	80	406	1500	2100	1500	330	60.3	60.3
	100	100		2500	3100				
	150	150							
	80	80	711	2500	3400	1650 1750	330	60.3	60.3
	100	100		3000	3900				
	150	150		4500	5400				
	250	250							
	300	300							
350	350								
80	80	1118	3000	4000	2350 2450 2550	520	60.3	60.3	
100	100		4500	5500					
150	150		5500	6500					
250	250								
300	300								
350	350								
400	400								
450	450								
500	500								
80	80	1321	3000	4200	2450 2550 2650	520	88.9	88.9	
100	100		4500	4700					
150	150		5500	6700					
250	250								
300	300								
350	350								
400	400								
450	450								
500	500								
600	600								
80	80	1524	4500	5900	3050 3150 3250	520	88.9	88.9	
100	100		5500	6900					
150	150		8500	8900					
250	250								
300	300								
350	350								
400	400								
450	450								
500	500								
600	600								
80	80	1829	4500	6150	3200 3300 3400	520	88.9	88.9	
100	100		5500	7150					
150	150		9000	10650					
250	250								
300	300								
350	350								
400	400								
450	450								
500	500								
600	600								


Ordering code

The gas separators STG 651, STG 652 and STG 653 type can be ordered by specifying the constructive form, inlet-outlet connection diameter, and maximum working pressure.

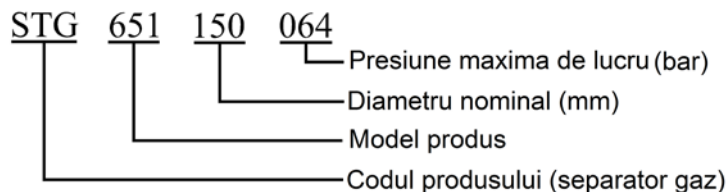

For example, the ordering code STG 651-150-064 designates STG 651 vertical separator, inlet-outlet connection diameter 150 mm, and maximum working pressure 64 bar. Additional requirements, if any, must be specified when placing the order.

STG 654 and STG 655 gas separators can be ordered by specifying product type, inlet – outlet connection diameter, maximum working pressure, body diameter, and body length.

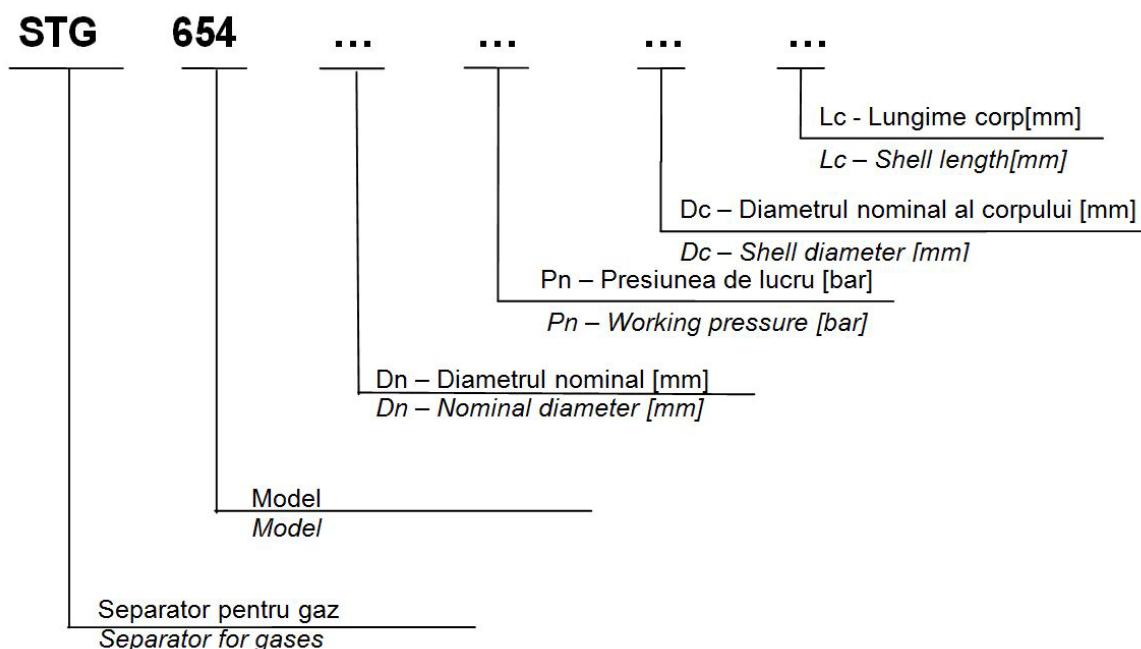

For example, the ordering code STG 651-100-064-1100-4500 designates STG 654 horizontal separator, inlet-outlet nominal diameter 100 mm, maximum working pressure 64 bar, body nominal diameter 1100 mm and body length 4500 mm. Additional requirements, if any, must be specified when placing the order.

The manufacturer reserves the right to make modifications without any prior notification.

CT Nr. 478 / 2011

TOTALGAZ INDUSTRIE

Nr. R.C.: J-22-3277/1994	Șos. Păcurari, nr. 128,
CUI: RO6658553	Iași, cod 700545, România
	Tel. : 0040-232-216.391(2)
IBAN: RO28BRDE240SV13842272400	Fax : 0040-232-215.983
B.R.D. G.S.G. Iași	E-mail: office@totalgaz.ro
	Web: www.totalgaz.ro



Certified Management System